

WIREFLOW

Design by Arik Levy.

Reference

0348.

Application

Hanging lamps

Installation type

Surface

Description

Wireflow designed by Arik Levy. Hanging lamp. Configure hanging light installations from an electrical connection point on the wall with a plug to facilitate installation. With Wireflow you can outline different geometrical shapes on walls or ceilings to create murals with a stunning graphic visual effect. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Diffuser

Pressed-glass diffuser

Materials

Ceiling rose: Steel

Body: Aluminum

Rods: Steel


Base: Steel

Finish



0348-04 Black (RAL 9005)

Sketch



Electrical characteristics


1 x LED 4,48W 350mA

Total 4.5 W



A+

VIBIA

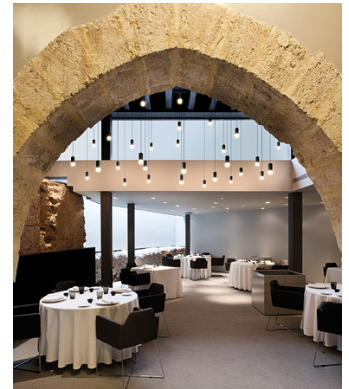

Light source: 2700K CRI >80 490 lm 109 lm/W

Fixture: 197 lm 43.77 lm/W

Driver included: CC - Constant Current 350 mA 100-240V 50/60Hz

Electronic dimming PUSH

Technical characteristics

- Plug-in
- Dimmer switch
- Switch on the wall plate

Physical characteristics

1 Box / 0.26 x 0.26 x 0.26 m. / Vol. 0.0175 m³ /

Gross weight 1.9 kg. / Net weight 1.7 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 40.10%

Coordinate system : CG

Total flux : 490.30

Maximum value : 53.85


Light position : C=15.00 G=55.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

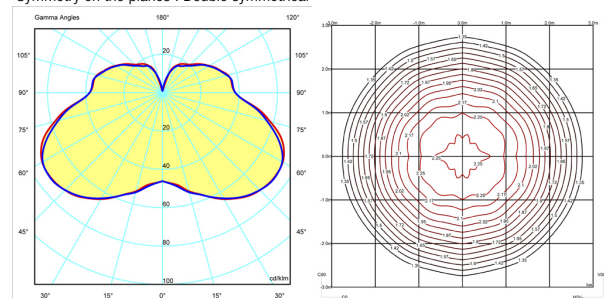

Certificates



